





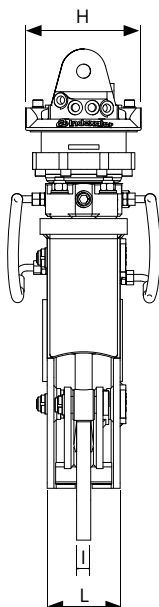

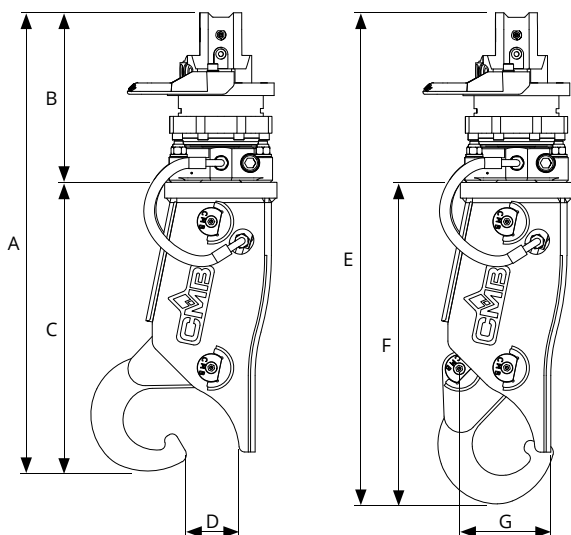

**GSC** SERIES

## HYDRAULIC LIFT HOOK FOR GLASS DOME GANCIO SVUOTAMENTO CAMPANE VETRO

**HARDOX**<sup>®</sup>  
IN MY BODY



GSC SERIES		GSC	
	ATTACHMENT WEIGHT	kg	45
	LIFTING POWER	kg	1850
A		mm	765
B		mm	260
C		mm	515
D		mm	95
E		mm	825
F		mm	575
G		mm	140
H		mm	210
I		mm	25
L		mm	130
	EXCAVATOR WORKING PRESSURE	bar	200
	EXCAVATOR OIL FLOW	l/min	20
	ROTATION WORKING PRESSURE	bar	200
	ROTATION OIL FLOW	l/min	8
HYDRAULIC ROTATORS INDEXATOR			GV4

Attachment-excavator couplings data are for information only, always check load diagram of the machine.

➤ **FRAME IN HARDOX 450**  
STRUTTURA IN HARDOX 450

➤ **SAFETY VALVE**  
VALVOLA DI SICUREZZA

➤ **HARDENED PINS**  
PERNI TEMPRATI

➤ **INDEXATOR HYDRAULIC ROTATOR**  
ROTATORE IDRAULICO INDEXATOR

GSC hydraulic hook is suitable for the glass dome handling. Thanks to its specific conformation allow the operator to work without assistance.

- > Hydraulic cylinder with safety valve
- > Safety hook

Il gancio idraulico serie GSC viene impiegato per il sollevamento e la movimentazione di campane dedicate alla raccolta di vetro.

- > Cilindro idraulico con valvola di sicurezza
- > Nasello di sicurezza

